The new DIO 110 is available in 3 different variants

The all-new DIO 110 Features				
Parameters	H-Smart	DLX	STD	
Smart Key	✓	X	х	
Wheels	Alloy	Golden Steel Rim	Black Steel Rim	
Digital Meter	✓	✓	х	
External Fuel Lid	✓	✓	✓	
Engine Start/Stop Switch	✓	✓	✓	
Front Pocket	✓	✓	✓	
Smart Switch/Multifunction Switch	Smart	Multifunction	Multifunction	
Passing Switch	✓	✓	✓	
LED Headlamp	✓	✓	х	
LED Position Light	✓	✓	✓	
Underseat Storage	✓	✓	✓	
Stylish Muffler Protector	√	✓	✓	
Split Grabrail	✓	✓	✓	
Retractable Pillion Foot Step	√	✓	✓	
PGM-FI	✓	✓	✓	
eSP Technology	✓	✓	✓	
Silent Start with ACG	√	√	✓	
Side Stand Engine Cutoff^	OP	OP	OP	
Battery Indicator	√	X	х	
Smart Key Indicator	✓	X	X	

^Available as Optional

- *The technical specifications and design of the vehicle may vary according to the requirements and conditions without any notice • DIO 110 meets Bharat Stage VI norms • Product shown in the picture may vary from actual product available in the market • Accessories shown in the picture are not part of standard equipment
- #The technical specifications mentioned are for H-Smart Variant *Available in H-Smart Variant and Deluxe Variant only • Distance to empty, real time and average mileage readings may vary as per riding conditions
- All features and colours may not be part of all variants.

	Parameters	Moscuroments	
		Measurements	
Body Dimensions	Length	1808 mm	
	Width	723 mm	
	Height	1150 mm	
	Wheel Base	1260 mm	
	Ground Clearance	160 mm	
	Kerb Weight	103 Kg	
	Seat Length	650 mm	
	Seat Height	765 mm	
	Fuel Tank Capacity	5.3 L	
Engine	Туре	4 Stroke, SI Engine	
	Displacement	109.51cc	
	Max Engine Output	5.78 kW @ 8000 rpm	
	Max Torque	9.03 N-m @ 5250 rpm	
	Fuel System	PGM-FI	
	Bore x Stroke	47.000 x 63.121 mm	
	Compression Ratio	10.0:1	
	Starting Method	Self Start	
Transmission	Clutch Type	Automatic Centrifugal Clutch Dry Type	
	No. of Gears	NA	
Tyres & Brakes	Tyre Size & Type (Front)	90/90-12 54J, Tubeless	
	Tyre Size & Type (Rear)	90/100-10 53J, Tubeless	
	Brake Type & Size (Front)	Drum (130mm)	
	Brake Type & Size (Rear)	Drum (130mm)	
Frame & Suspension	Frame Type	Underbone	
	Front Suspension	Telescopic	
	Rear Suspension	Unit Swing	
Electricals	Battery	12V, 3.0 Ah	
	Headlamp	LED	

Honda Motorcycle and Scooter India Pvt. Ltd., Registered Office: Plot No. 1, Sector - 03, IMT Manesar, Distt. Gurugram, (Haryana) – 122050, India

Visit us at: www.honda2wheelersindia.com Customer Care: customercare@honda2wheelersindia.com



3 + 7 Years Warranty Package

*Complete peace of mind with 10 years warranty package. Comprising 3 years standard and 7 years optional service warranty.

Dealer Stamp: Leela Motors
Dharampur Road
Valsad
Tel: 9998459434
Mob: 9727771835 BOOK ONLINE NOW! With H-Smart Technology

Technical Specifications#



0 - - - 4



Track all vital updates like Real-Time Mileage, Average Mileage, Distance to Empty and Battery Indicator amongst others, on the go! DISTANCE TO EMPTY

REAL-TIME MILEAGE

AVERAGE MILEAGE

SMART KEY INDICATOR

BATTERY INDICATOR

SERVICE DUE INDICATOR

3-STEP ECO INDICATOR


The sensor-based PGM-FI
System constantly injects
optimum fuel with air which
delivers an efficient combustion
and results in consistent power
output and more mileage.

PGM-FI FUEL INJECTION







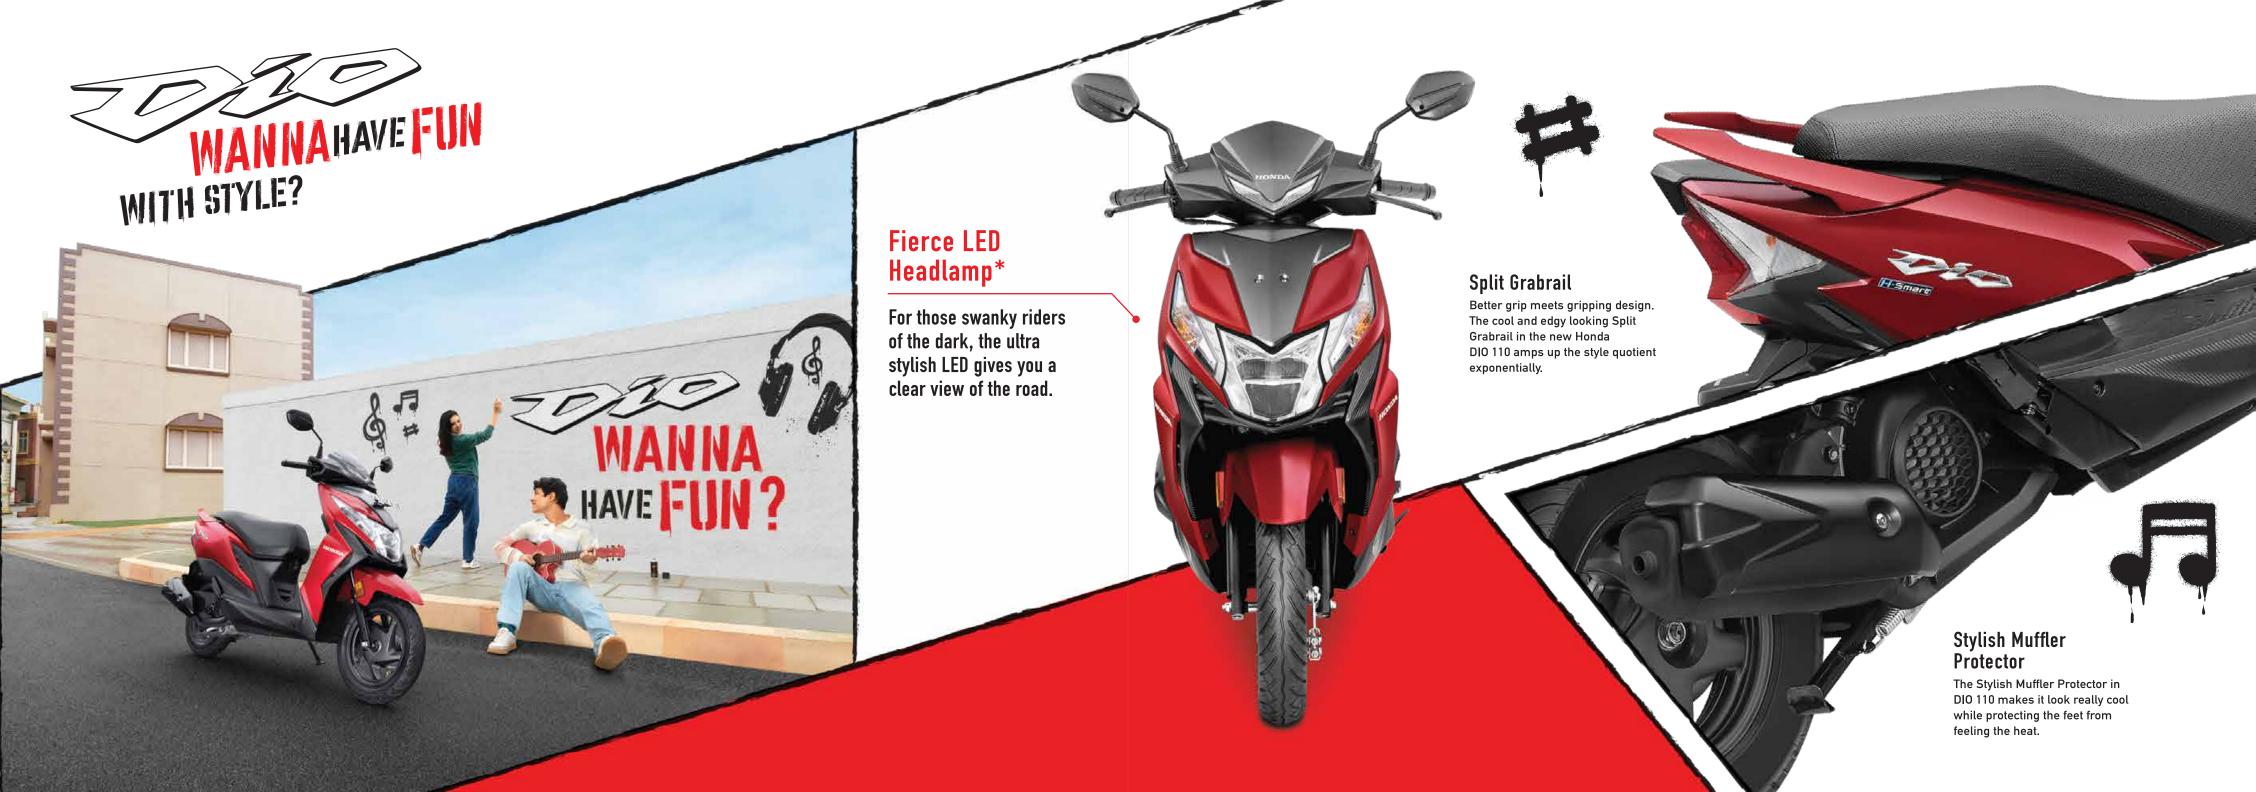







Deluxe Variants

Mat Axis Grey Metallic

Dazzle Yellow Metallic

Mat Sangria Red Metallic

